

# Prizmatix

## Mic-LED-375

### High Power Collimated Ultra-Violet LED Light Source for Fluorescence Microscopy

Featuring Prizmatix Modular Design for Multi-Wavelength and Fiberoptic Setup

Ver. 12

#### Introduction

The compact Mic-LED-375, High Power UV LED light source is an effective replacement of Mercury and Xenon lamps in many power demanding applications, such as fluorescence microscopy, photo activation (e.g. uncaging), machine vision and numerous others.

The LED source provides **>300 mW** of **collimated** UV power on its output. The LED driver supports CW or pulsed operation.

As a member of the modular OptiBlocks family the Mic-LED-375 can be easily converted to numerous configurations providing outstanding versatility (see Accessories section).



#### Key Features

- Compatible with Prizmatix modular Microscope-LED Light-Source products family – for **Multi-Wavelength, fiberoptic** applications and more. See all accessories on page 4.
- Easy connection to Olympus, Nikon, Zeiss or Leica microscopes by direct adaptor connection, Liquid Light Guide or Optical fiber
- Single chip High Brightness UV LED
- TTL external triggering (no mechanical shutter needed)
- Analog input, USB and LabView software (Optional features)
- Easy illumination field adjustment by XY and Focus (collimation)
- Very Stable. Precisely adjustable power
- Passive cooling without fan

#### Applications

- Fluorescence microscopy and Imaging
- Photolysis of caged compounds (uncaging). See also Prizmatix UHP-T-LED-385.
- FRET, FRAP (fluorescence recovery after photobleaching)
- NADH, Quantum Dots, BFP, DAPI, Fura, Hoechst, excitation

---

#### Main Office

Phone: +972-72-2500097  
Fax: +972-72-2500096  
sales@prizmatix.com

#### European Sales Office

Phone: +44-(0)77-9172-9592  
Fax: +44-(0)20-7681-2977  
sales.europe@prizmatix.com

#### North America Sales Office

Phone: +1-(248)-436-8085  
Fax: +1-(248)-281-5236  
sales.usa@prizmatix.com

---


P.O.B. 244 Givat-Shmuel 5410102, Israel

---

# Prizmatix

## Optical Specifications

Peak Wavelength	nm	375 ± 4
Emission Spectrum FWHM	nm	~10
Collimated optical power output	mW	>300
Beam Diameter	mm	~22
Beam Divergence (full angle at collimation)	mrad	~45
Measured output power with FCA (fiber coupling adaptor, see accessories section below) connected to Polymer Optical Fiber Length 1m, NA 0.5, Core diameter 1000 / 1500 / 2000 um	mW	> 70 / 80 / 90

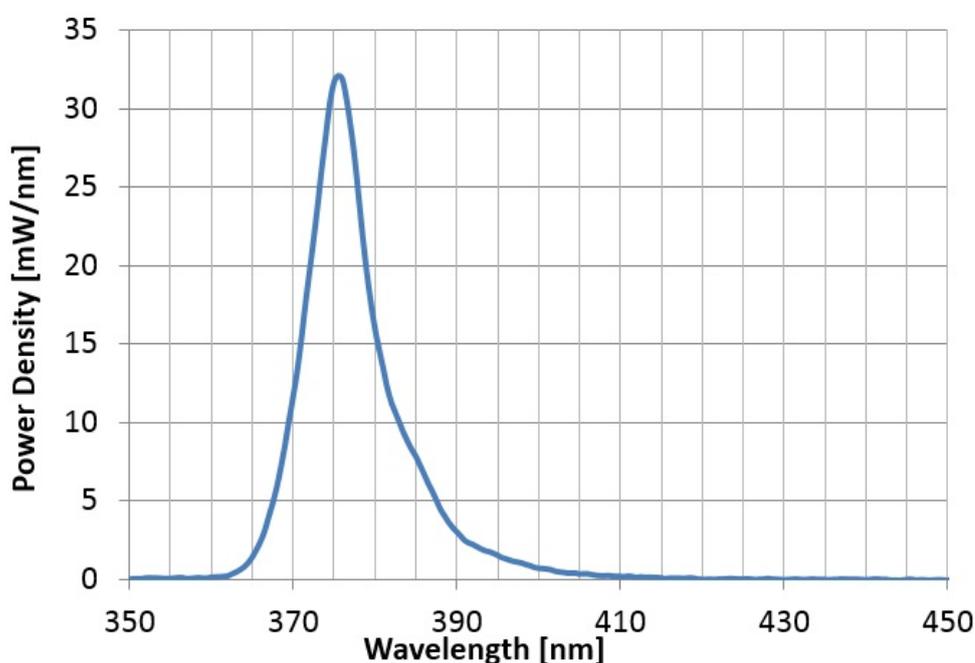

- Mic-LED-375 spectrum

## BLCC-02 Benchtop LED Current Controller Specifications

### Features

- Constant current or chopping modes
- Precise LED current setting by 10 turn dial
- TTL external trigger input
- Compact and robust enclosure
- Analog Input (optional)
- USB control (optional)

### Main Office

Phone: +972-72-2500097  
Fax: +972-72-2500096  
sales@prizmatix.com

### European Sales Office

Phone: +44-(0)77-9172-9592  
Fax: +44-(0)20-7681-2977  
sales.europe@prizmatix.com

### North America Sales Office

Phone: +1-(248)-436-8085  
Fax: +1-(248)-281-5236  
sales.usa@prizmatix.com

P.O.B. 244 Givat-Shmuel 5410102, Israel


# Prizmatix

Digital modulation input		TTL
Connector for TTL input and Analog Input		BNC
Digital modulation frequency	Hz	DC-10000
Rise / Fall time (10% - 90%)	µs	20
Input Voltage	V	12
Max Input current	A	1
Power Adaptor Input		100-240 VAC, 50-60Hz, 1.5A

## General Specifications

Operation temperature range	°C	10 - 40
Storage temperature range	°C	-10 - 55
Operating relative humidity (Non condensing)	%	<90
Head dimensions		See drawing below
BLCC-02	mm	75 x 40 x 120
Controller dimensions (W x H x L)		
Power adaptor dimensions (W x H x L)	mm	60 x 35 x 10

## Mic-LED-375 Head Mechanical Drawings

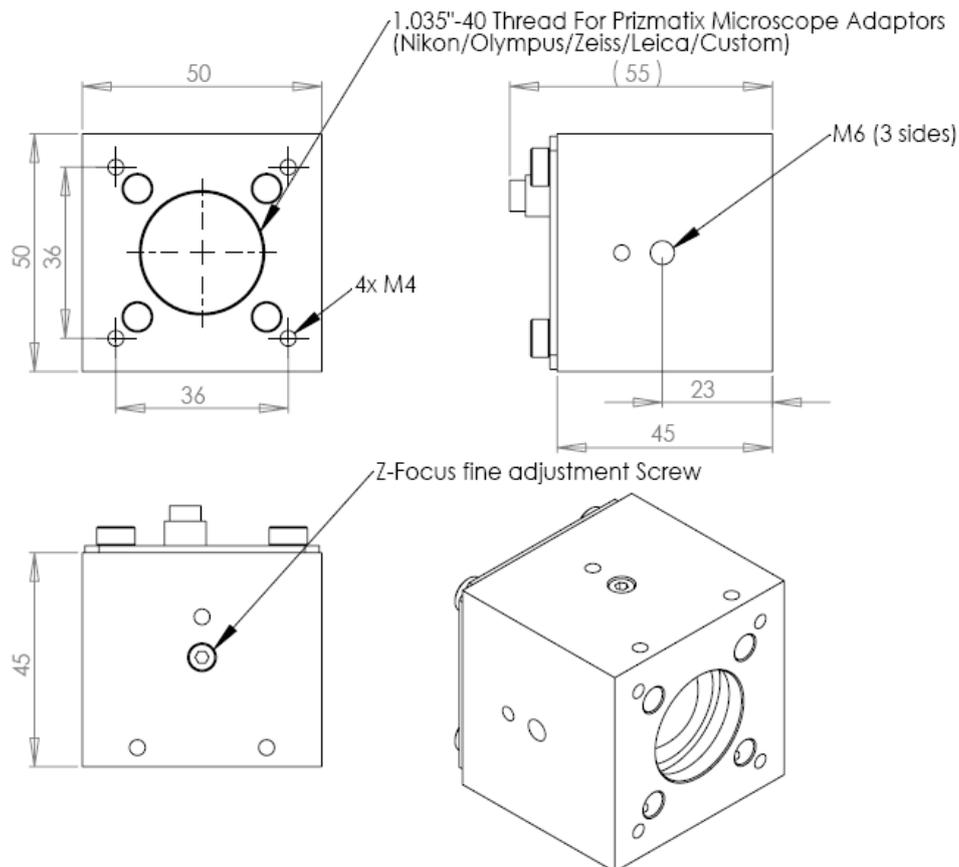

### Main Office

Phone: +972-72-2500097  
 Fax: +972-72-2500096  
 sales@prizmatix.com

### European Sales Office

Phone: +44-(0)77-9172-9592  
 Fax: +44-(0)20-7681-2977  
 sales.europe@prizmatix.com


### North America Sales Office

Phone: +1-(248)-436-8085  
 Fax: +1-(248)-281-5236  
 sales.usa@prizmatix.com

P.O.B. 244 Givat-Shmuel 5410102, Israel

# Prizmatix

## Accessories for Mic-LED-375

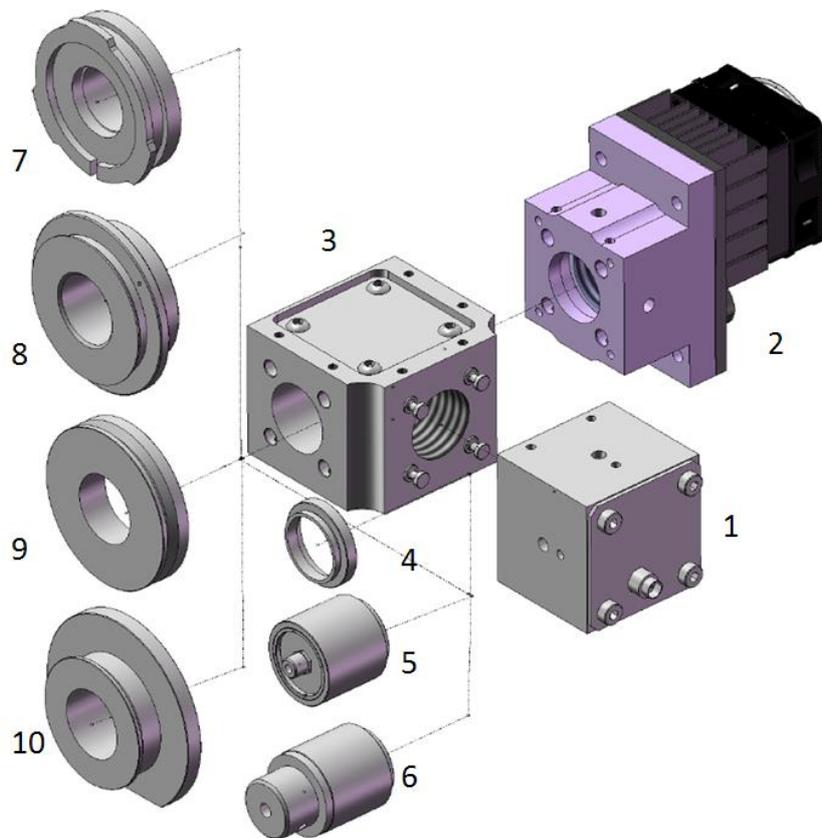

#	Part	Description
1	Mic-LED-375	Microscope LED 375 nm
2	UHP-Mic-LED-???	Ultra high power LED at ??? nm
3	Multi-LED-BC	Beam Combiner with dichroic mirror
4	SM1 adaptor	Adaptor to SM1 thread
5	FCA	Fiber coupler adaptor
6	LLGA	Light guide adaptor
7	Nikon adaptor	Adaptor for Nikon fluorescence microscope
8	Zeiss adaptor	Adaptor for Zeiss fluorescence microscope
9	Olympus adaptor	Adaptor for Olympus fluorescence microscope
10	Leica adaptor	Adaptor for Leica fluorescence microscope

### Main Office

Phone: +972-72-2500097  
 Fax: +972-72-2500096  
[sales@prizmatix.com](mailto:sales@prizmatix.com)

### European Sales Office

Phone: +44-(0)77-9172-9592  
 Fax: +44-(0)20-7681-2977  
[sales.europe@prizmatix.com](mailto:sales.europe@prizmatix.com)

### North America Sales Office

Phone: +1-(248)-436-8085  
 Fax: +1-(248)-281-5236  
[sales.usa@prizmatix.com](mailto:sales.usa@prizmatix.com)

P.O.B. 244 Givat-Shmuel 5410102, Israel

# Prizmatix

---

## **Microscope Adaptor**

The Mic-LED-375 can be directly connected to standard epi-fluorescence port of Olympus, Nikon, Zeiss or Leica microscope. The user can exchange microscope adaptor easily by simple screwing the adaptor to the Mic-LED-375 head.

## **Beam Combiner Module**

The output beam of Mic-LED-375 can be collinearly combined with additional Mic-LEDs, UHP-LEDs, UHP-T-LEDs and UHP-T-LED-White-High-CRI, by Dichroic Beam Combiners. The Beam Combiner is connected to the Mic-LED by means of four connection pins.

## **Light Guide Adaptor and Liquid Light Guide (LLG)**

The Light Guide Adaptor can be easily screwed into the Mic-LED-375 converting the Mic-LED into a LLG coupled light source. Prizmatix can supply the LLG or adapt the Light Guide Adaptor to match your light guide

## **Fiber Adaptor and Optical Fiber**

The Fiber Adaptor can be easily screwed into the Mic-LED-375 converting the Mic-LED into a Fiber Coupled LED light source. Prizmatix can supply a variety of fiber patch cords and custom fiber optic assemblies as well as Fiber Collimator for high NA fibers

## **Filter Wheel and Filter Adaptor**

The Mic-LED-375 can be connected to a 6 positions Filter wheel or to a filter adaptor to provide additional filtration of LED output spectrum.

**Remark:** Most accessories can be connected in series to create complex system.

---

### **Main Office**

Phone: +972-72-2500097  
Fax: +972-72-2500096  
sales@prizmatix.com

### **European Sales Office**

Phone: +44-(0)77-9172-9592  
Fax: +44-(0)20-7681-2977  
sales.europe@prizmatix.com

### **North America Sales Office**

Phone: +1-(248)-436-8085  
Fax: +1-(248)-281-5236  
sales.usa@prizmatix.com

---

P.O.B. 244 Givat-Shmuel 5410102, Israel

---