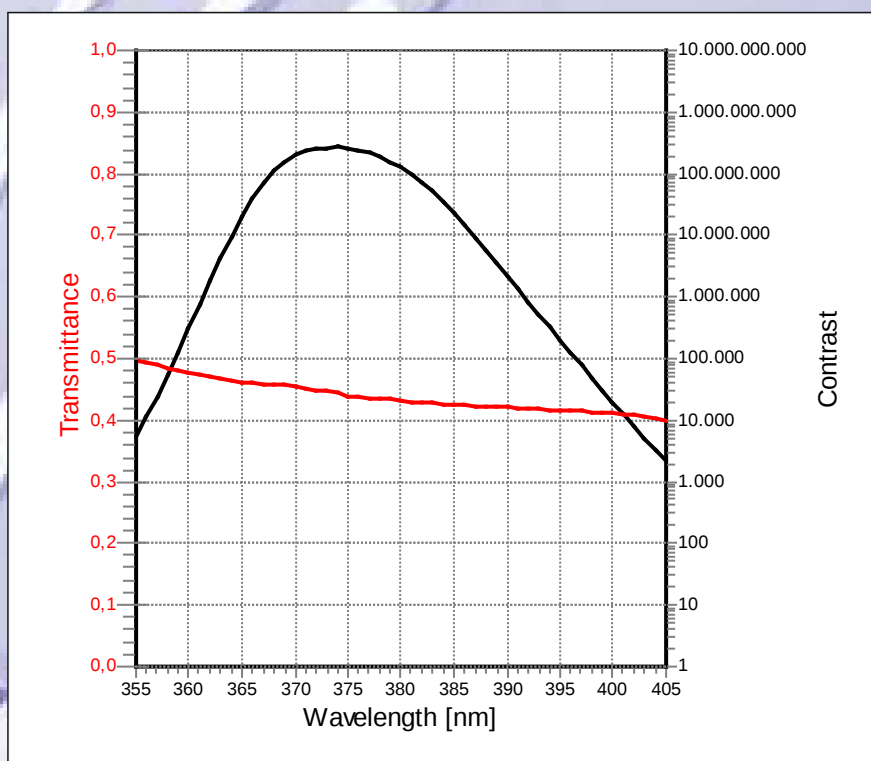


colorPol® UV 375 BC5

Spectral range	UV
Wavelength range with contrast > 100 000 : 1 ⁽¹⁾	362 to 392 nm
Transmittance (uncoated)	> 40 % up to 47 %
Wavelength range with contrast > 10 000 : 1 ⁽¹⁾	360 to 397 nm
Transmittance (uncoated)	> 40 % up to 48 %
Wavelength range with contrast > 1 000 : 1 ⁽¹⁾	357 to 403 nm
Transmittance (uncoated)	> 39 % up to 48 %
Filter thickness (laminated) ⁽²⁾	1,7 ± 0,2 mm / 2,0 ± 0,2 mm
Acceptance angle	± 20°
Polarization axis	< 0.5° to edge
Operating temperature	-20 to +80 °C
⁽¹⁾ contrast: ratio of parallel to perpendicular transmittance ⁽²⁾ other thicknesses on request	
Date: 09.02.2010	


CODIXX AG

Steinfeldstraße 3
D-39179 Barleben
Germany

Elliot Scientific Ltd.

Unit 11 Sandridge Park, Porters Wood,
St Albans, AL3 6PH, United Kingdom
Tel: +44 (0)1582 766300
Fax: +44 (0)1582 766340
www.elliotscientific.com
sales@elliotscientific.com

Phone: +49 39203 963 0
Fax: +49 39203 963 33
Email: colorpol@codixx.de
Internet: www.codixx.de

Version 1.4 – 10/22/2003