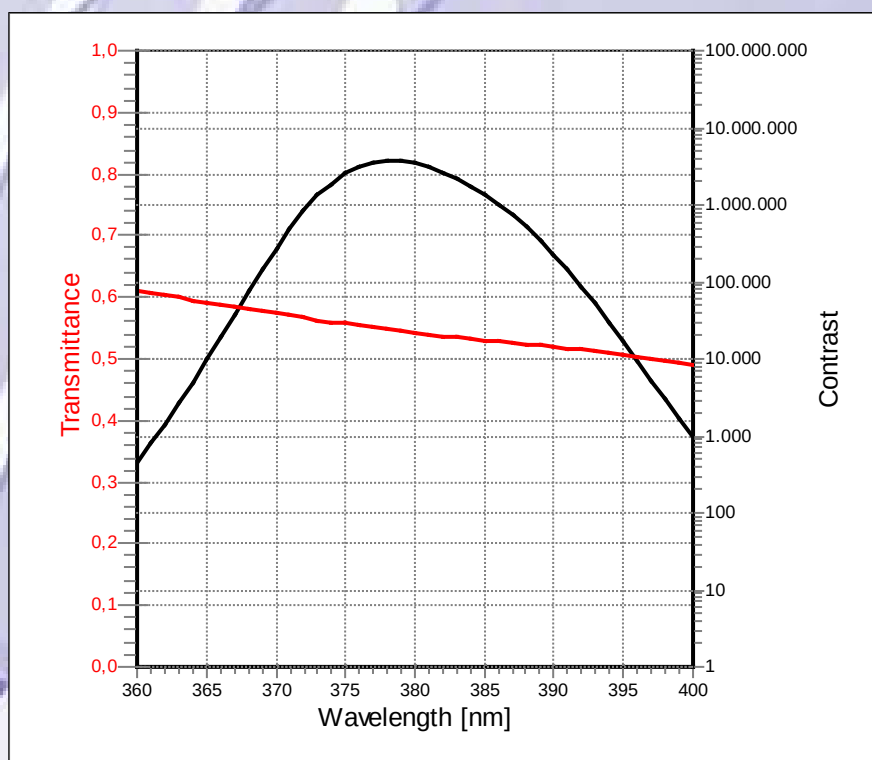


colorPol® UV 380 BC4

Spectral range	UV
Wavelength range with contrast > 100 000 : 1 ⁽¹⁾	372 to 388 nm
Transmittance (uncoated)	> 52 % up to 57 %
Wavelength range with contrast > 10 000 : 1 ⁽¹⁾	369 to 390 nm
Transmittance (uncoated)	> 52 % up to 58 %
Wavelength range with contrast > 1 000 : 1 ⁽¹⁾	365 to 395 nm
Transmittance (uncoated)	> 51 % up to 59 %
Filter thickness (laminated) ⁽²⁾	1,7 ± 0,2 mm / 2,0 ± 0,2 mm
Acceptance angle	± 20°
Polarization axis	< 0.5° to edge
Operating temperature	-20 to +80 °C
⁽¹⁾ contrast: ratio of parallel to perpendicular transmittance ⁽²⁾ other thicknesses on request	
Date: 01.10.2010	


CODIXX AG

 Steinfeldstraße 3
 D-39179 Barleben
 Germany

Elliot Scientific Ltd.

 Unit 11 Sandridge Park, Porters Wood,
 St Albans, AL3 6PH, United Kingdom
 Tel: +44 (0)1582 766300
 Fax: +44 (0)1582 766340
 www.elliotscientific.com
 sales@elliotscientific.com

 Phone: +49 39203 963 0
 Fax: +49 39203 963 33
 Email: colorpol@codixx.de
 Internet: www.codixx.de

Version 1.4 – 10/22/2003