



## colorPol® IR 1310 BC4 HT

Developed to match special needs of NIR applications between 1 280 nm and 1 500 nm. This polarizer utilizes dichroism of silver nanoparticles in glass to achieve superior contrast and durability.

Custom shapes, sizes and patterned structures are possible due to larger manufactured substrates. For assistance please contact your CODIXX Sales Engineer or one of the local distributors with your custom requirements.

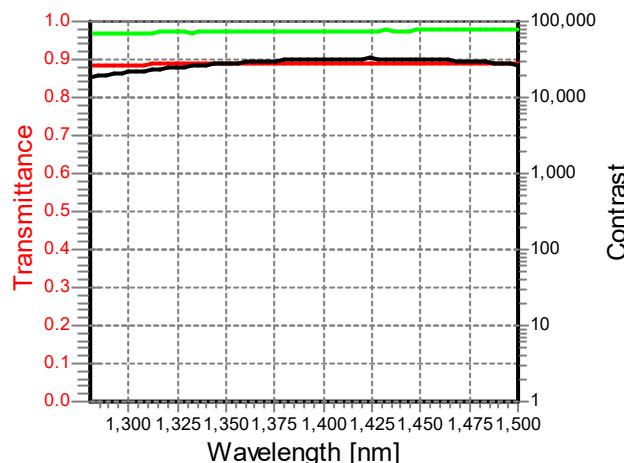

Typical contrast (black) and transmittance (uncoated red, with AR-coating C1310 green) for unlaminated parts

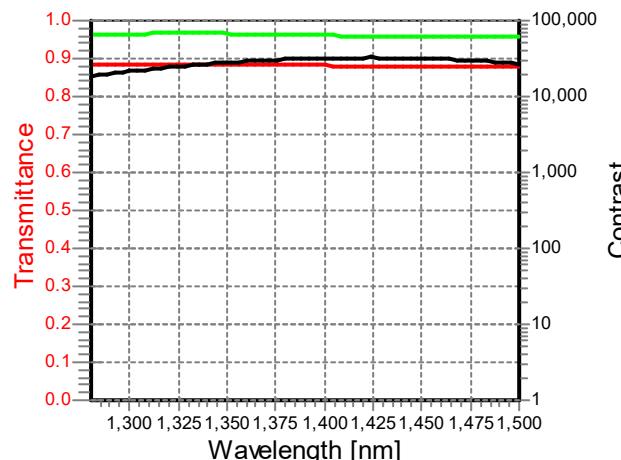

Typical contrast (black) and transmittance (uncoated red, with AR-coating C1310 green) for laminated parts

### Key Benefits

- Transmittance typically 97 % with antireflection (AR) coating
- Contrast ratio greater than 10,000 : 1
- Ideal for applications using the NIR wavelength ranges
- Customization
- Highly durable

### Applications

- Free space isolators operating from 1 280 nm up in O- and E-bands
- Optical communication
- Optical switches
- NIR spectroscopy
- Polarization interferometry
- Signal-to-Noise-Ratio monitoring
- Polarization analysis, monitoring and control
- Polarization mode dispersion monitoring and measurement

**Elliot Scientific Ltd.**  
Unit 11 Sandridge Park, Porters Wood,  
St Albans, AL3 6PH, United Kingdom  
Tel: +44 (0)1582 766300  
Fax: +44 (0)1582 766340  
[www.elliotscientific.com](http://www.elliotscientific.com)  
[sales@elliotscientific.com](mailto:sales@elliotscientific.com)

## Specifications colorPol® IR 1310 BC4 HT

	unlaminated	laminated
Spectral range	NIR	
Wavelength range with contrast > 10,000 : 1 <sup>(1)</sup>	1280 to 1500 nm	
Transmittance uncoated with AR-coating C1310 with 1 side AR-coating CS1310	> 88 % > 96 % > 92 %	> 87 % > 95 % > 91 %
Filter thickness <sup>(2)</sup>	270 ± 50 µm	1.7 ± 0.2 mm <sup>(3)</sup> 2.0 ± 0.2 mm <sup>(4)</sup>
Acceptance angle (coating reference for 0°)	± 20°	
Accuracy of polarization axis to edge	< 0.5°	
Usual surface quality (MIL-O-13830A: Scratch / Dig) <sup>(5)</sup>	40 / 20	
Operating temperature	-50 to +400 °C	-20 to +120 °C
Transmitted wavefront distortion at 633 nm over an inspection area of Ø10 mm	< 3 λ	< λ/4 <sup>(4)</sup>
Recommended safe operation limit		
Laser damage threshold		
Continuous block	10 W/cm²	1 W/cm²
Continuous pass	25 W/cm²	5 W/cm²
Pulse peak power	12 MW/cm²	1 MW/cm²
Equivalent pulse power density	1 µJ/cm²	100 nJ/cm²

<sup>(1)</sup> contrast: ratio of parallel to perpendicular transmittance<sup>(4)</sup> laminated, ground and polished<sup>(2)</sup> other thicknesses on request<sup>(5)</sup> other specifications available on request<sup>(3)</sup> laminated

Issued: 30/04/2018

Version: 1.01



**Elliot Scientific Ltd.**  
Unit 11 Sandridge Park, Porters Wood,  
St Albans, AL3 6PH, United Kingdom  
Tel: +44 (0)1582 766300  
Fax: +44 (0)1582 766340  
[www.elliotscientific.com](http://www.elliotscientific.com)  
[sales@elliotscientific.com](mailto:sales@elliotscientific.com)

This document is for information purposes only. CODIXX AG reserves the right to change technical information without notice.