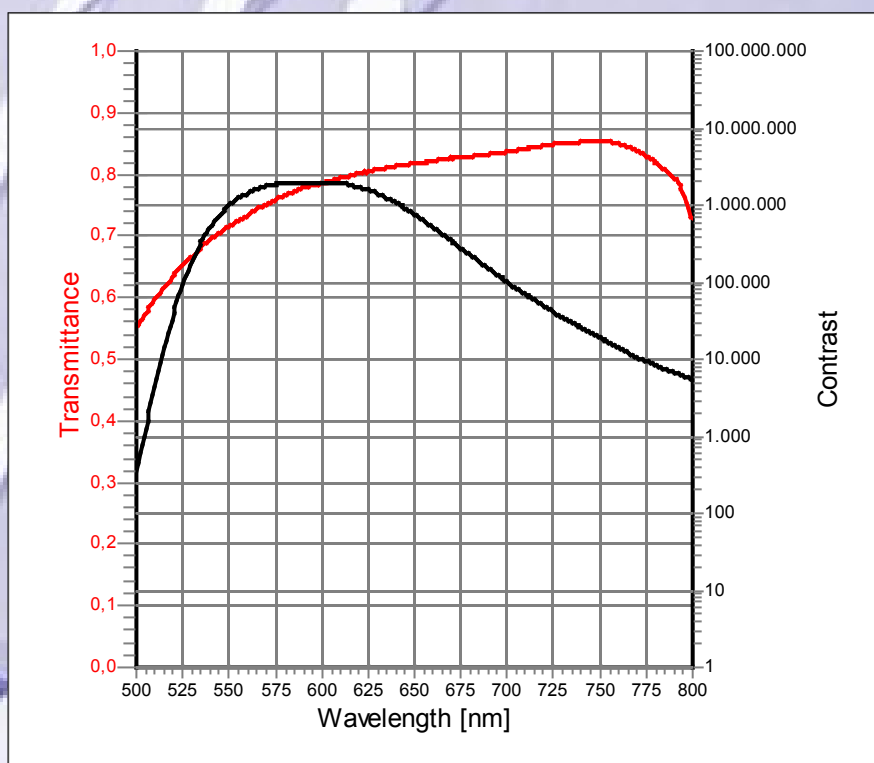


colorPol® VIS 600 BC5 CW01

Spectral range	VIS
Wavelength range with contrast > 100 000 : 1 ⁽¹⁾	530 to 640 nm
Transmittance (antireflection coating, 0° incident angle)	> 66 % up to 83 %
Wavelength range with contrast > 10 000 : 1 ⁽¹⁾	520 to 740 nm
Transmittance (antireflection coating, 0° incident angle)	> 63 % up to 86 %
Wavelength range with contrast > 1 000 : 1 ⁽¹⁾	510 to 750 [800] nm
Transmittance (antireflection coating, 0° incident angle)	> 58 % up to 86 %
Filter thickness (laminated) ⁽²⁾	1,7 ± 0,2 mm / 2,0 ± 0,2 mm
Acceptance angle	± 20°
Polarization axis	< 0.5° to edge
Operating temperature	-20 to +120 °C
⁽¹⁾ contrast: ratio of parallel to perpendicular transmittance ⁽²⁾ other thicknesses on request	
Date: 04.02.2016	


CODIXX AG

Steinfeldstraße 3
D-39179 Barleben
Germany

Elliot Scientific Ltd.

Unit 11 Sandridge Park, Porters Wood,
St Albans, AL3 6PH, United Kingdom
Tel: +44 (0)1582 766300
Fax: +44 (0)1582 766340
www.elliotscientific.com
sales@elliotscientific.com

Phone: +49 39203 963 0
Fax: +49 39203 963 33
Email: colorpol@codixx.de
Internet: www.codixx.de

Version 1.4 – 04/07/2004