

GS-1290-NVIS Spectroradiometer




The GS-1290-NVIS is an advanced, high-speed spectroradiometer that combines the leading-edge sensitivity of two-stage, cooled, backside-thinned CCD detector technology with the industry-renowned RadOMAcam radiometric telescope from Gamma Scientific.

Configured for NVIS testing of displays and associated lighting, the instrument exceeds all requirements outlined in MIL-L-85762A and MIL-STD-3009, covering the range of 360-930nm with six different field-of-view apertures.

Original system calibration is performed in our ISO/IEC 17025 accredited laboratory by NVLAP (NVLAP lab code 200823-0), and through our Light Touch software, users with a known calibration standard can perform in-house calibration if so desired.


Exceptional Sensitivity & Speed For NVIS Test & Characterization

- Measurements to 1.5×10^{-4} cd/m² with a 100:1 SNR
- Resolution of 0.6 nm per pixel with dual-stage, cooled CCD
- Wavelength range options of 360-930nm or 360-1100nm
- Aperture Settings from 0.1° to 5°
- Internal LED spot projector and digital viewfinder indication and recording of precise measurement location
- USB 2.0 Interface and Windows-based Light Touch NVIS Software
- Pass / Fail Report generator per MIL-STD
- Direct Excel export of data and reports
- Can be user-calibrated with known standard

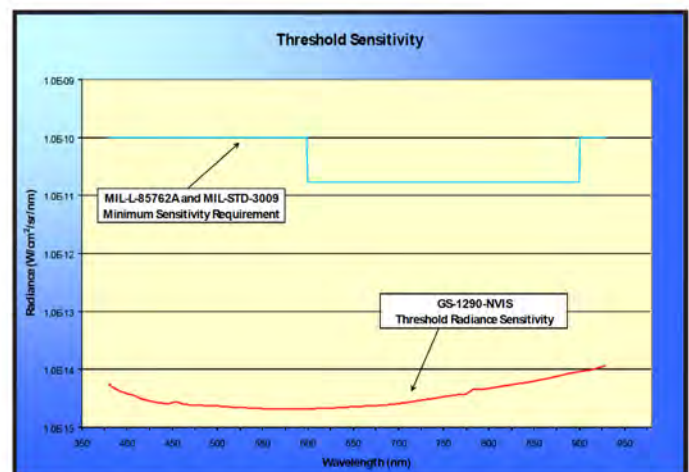


Threshold sensitivity curve obtained using 5 degree field-of-view

Detector and Wavelength Specifications	
Wavelength Range	GS-1290-NVISSYS-1: 360-950 nm
	GS-1290-NVISSYS-2: 360-1100 nm
Wavelength Resolution	GS-1290-NVISSYS-1: 0.6 nm
	GS-1290-NVISSYS-2: 0.9 nm
Half-power Bandwidth	10 nm
Wavelength Repeatability	0.02 nm
Wavelength Accuracy	> 0.3 nm
Stray Light @ 633nm	< 1.0×10^{-4} ($< 1.0 \times 10^{-5}$ with spectral purity enhancement applied)
Polarization Error	< 1%
Electrical Resolution	16-bit
Aperture Sizes	5°, 2°, 1°, 0.5°, 0.33°, 0.1°
Viewing System	Integrated video with imaged measurement aperture

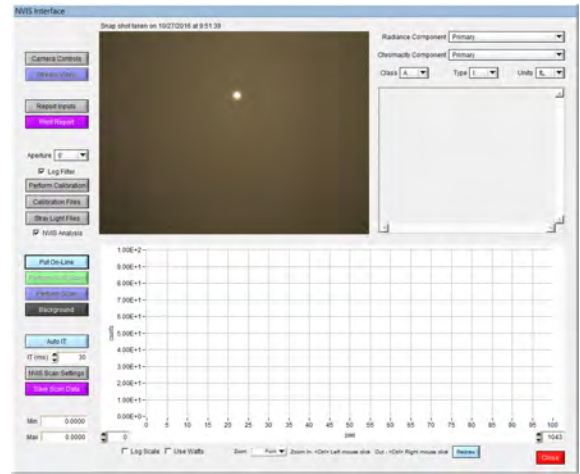

General Specifications	
Lens	180 mm Macro
Fiber Optic Coupler	2 meter (included)
Computer Interface	USB 2.0 with Light Touch for Windows®
Calibration Report	Per ISO/IEC 17025
Operating Temperature	0 to 35° C
Relative Humidity	< 95% (non-condensing)
Dimensions	30 cm H x 15 cm W x 31 cm L Weight 4.6 kg

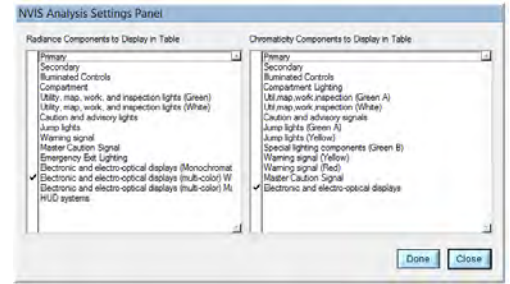

Aperture	Sensitivity	Chromaticity Accuracy		Measurement Spot Size @ 279mm Working Distance
5.0°	1.5×10^{-5} to 3.6×10^4 cd/m ²	x,y: $\pm 2.0 \times 10^{-3}$ x,y: $\pm 1.5 \times 10^{-3}$ x: $\pm 1.5 \times 10^{-3}$ y: $\pm 1.0 \times 10^{-3}$	1.5×10^{-4} to 5.0×10^{-2} cd/m ² 5.0×10^{-2} to 8.0×10^2 cd/m ² 8.0×10^2 to 3.65×10^4 cd/m ²	10.49 mm
2.0°	2.2×10^{-5} to 5.4×10^4 cd/m ²	x,y: $\pm 2.5 \times 10^{-3}$ x,y: $\pm 1.5 \times 10^{-3}$ x: $\pm 1.5 \times 10^{-3}$ y: $\pm 1.0 \times 10^{-3}$	2.0×10^{-4} to 7.0×10^{-2} cd/m ² 7.0×10^{-2} to 1.15×10^3 cd/m ² 1.15×10^3 to 5.36×10^4 cd/m ²	4.20 mm
1.0°	9.0×10^{-5} to 2.2×10^5 cd/m ²	x,y: $\pm 2.5 \times 10^{-3}$ x,y: $\pm 1.5 \times 10^{-3}$ x: $\pm 1.5 \times 10^{-3}$ y: $\pm 1.0 \times 10^{-3}$	9.0×10^{-4} to 3.0×10^{-1} cd/m ² 3.0×10^{-1} to 4.7×10^3 cd/m ² 4.7×10^3 to 2.2×10^5 cd/m ²	2.10 mm
0.5°	3.4×10^{-4} to 8.3×10^5 cd/m ²	x,y: $\pm 2.5 \times 10^{-3}$ x,y: $\pm 1.5 \times 10^{-3}$ x: $\pm 1.5 \times 10^{-3}$ y: $\pm 1.0 \times 10^{-3}$	3.0×10^{-3} to 1.1×10^0 cd/m ² 1.1×10^0 to 1.77×10^4 cd/m ² 1.77×10^4 to 8.3×10^5 cd/m ²	1.05 mm
0.3°	1.6×10^{-4} to 3.9×10^6 cd/m ²	x,y: $\pm 2.5 \times 10^{-3}$ x,y: $\pm 1.5 \times 10^{-3}$ x: $\pm 1.5 \times 10^{-3}$ y: $\pm 1.0 \times 10^{-3}$	1.6×10^{-3} to 5.1×10^0 cd/m ² 5.1×10^0 to 8.35×10^4 cd/m ² 8.35×10^4 to 3.9×10^6 cd/m ²	0.69 mm
0.1°	9.0×10^{-3} to 2.2×10^7 cd/m ²	x,y: $\pm 2.5 \times 10^{-3}$ x,y: $\pm 1.5 \times 10^{-3}$ x: $\pm 1.5 \times 10^{-3}$ y: $\pm 1.0 \times 10^{-3}$	9.0×10^{-3} to 2.9×10^1 cd/m ² 2.9×10^1 to 4.7×10^5 cd/m ² 4.7×10^5 to 2.19×10^6 cd/m ²	0.21 mm

Specifications are subject to change without notice