


colorPol® UV 380 BC4

Spectral range	UV
Wavelength range with contrast > 100 000 : 1 ⁽¹⁾	372 to 388 nm
Transmittance (uncoated)	> 52 % up to 57 %
Wavelength range with contrast > 10 000 : 1 ⁽¹⁾	369 to 390 nm
Transmittance (uncoated)	> 52 % up to 58 %
Wavelength range with contrast > 1 000 : 1 ⁽¹⁾	365 to 395 nm
Transmittance (uncoated)	> 51 % up to 59 %
Filter thickness ⁽²⁾	220 ± 50 µm
Acceptance angle	± 20°
Polarization axis	< 0.5° to edge
Operating temperature	-50 to +400 °C
⁽¹⁾ contrast: ratio of parallel to perpendicular transmittance	
⁽²⁾ other thicknesses on request	
Date: 02.02.2007	

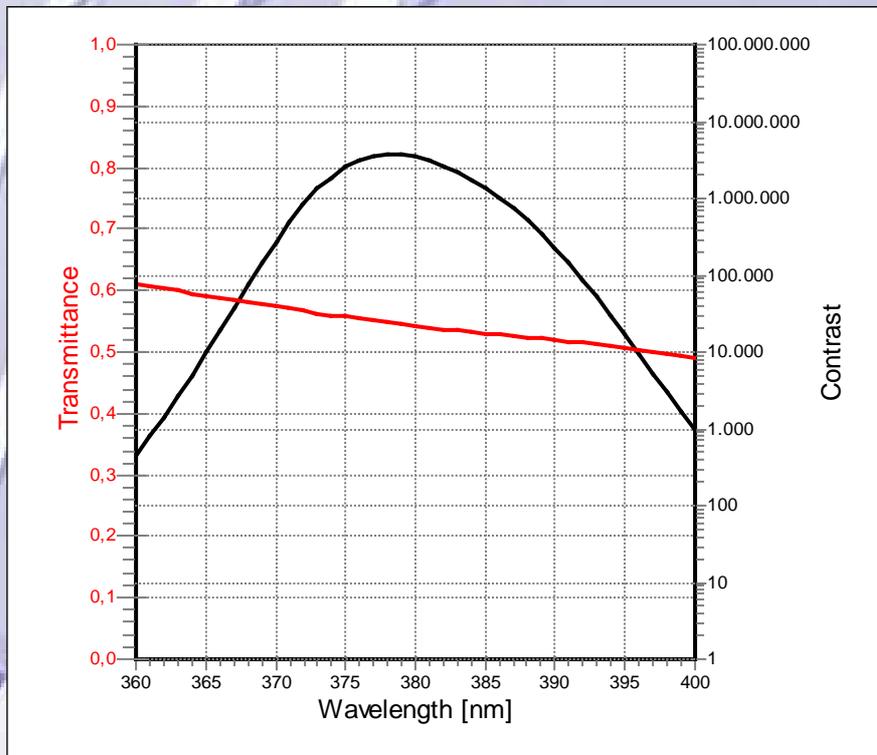

CODIXX AG

Steinfeldstraße 3
D-39179 Barleben
Germany

Elliot Scientific Ltd.

Unit 11 Sandridge Park, Porters Wood,
St Albans, AL3 6PH, United Kingdom
Tel: +44 (0)1582 766300
Fax: +44 (0)1582 766340
www.elliotscientific.com
sales@elliotscientific.com

Phone: +49 39203 963 0
Fax: +49 39203 963 33
Email: colorpol@codixx.de
Internet: www.codixx.de

Version 1.4 – 10/22/2003